
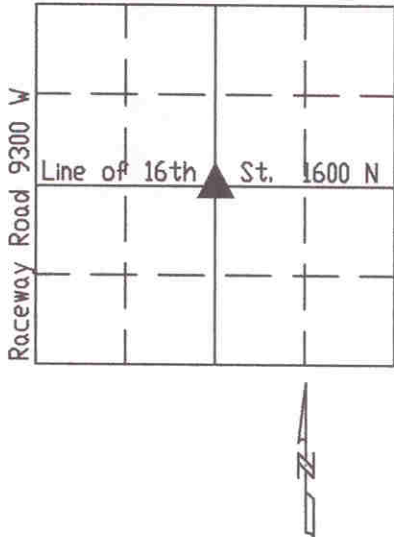
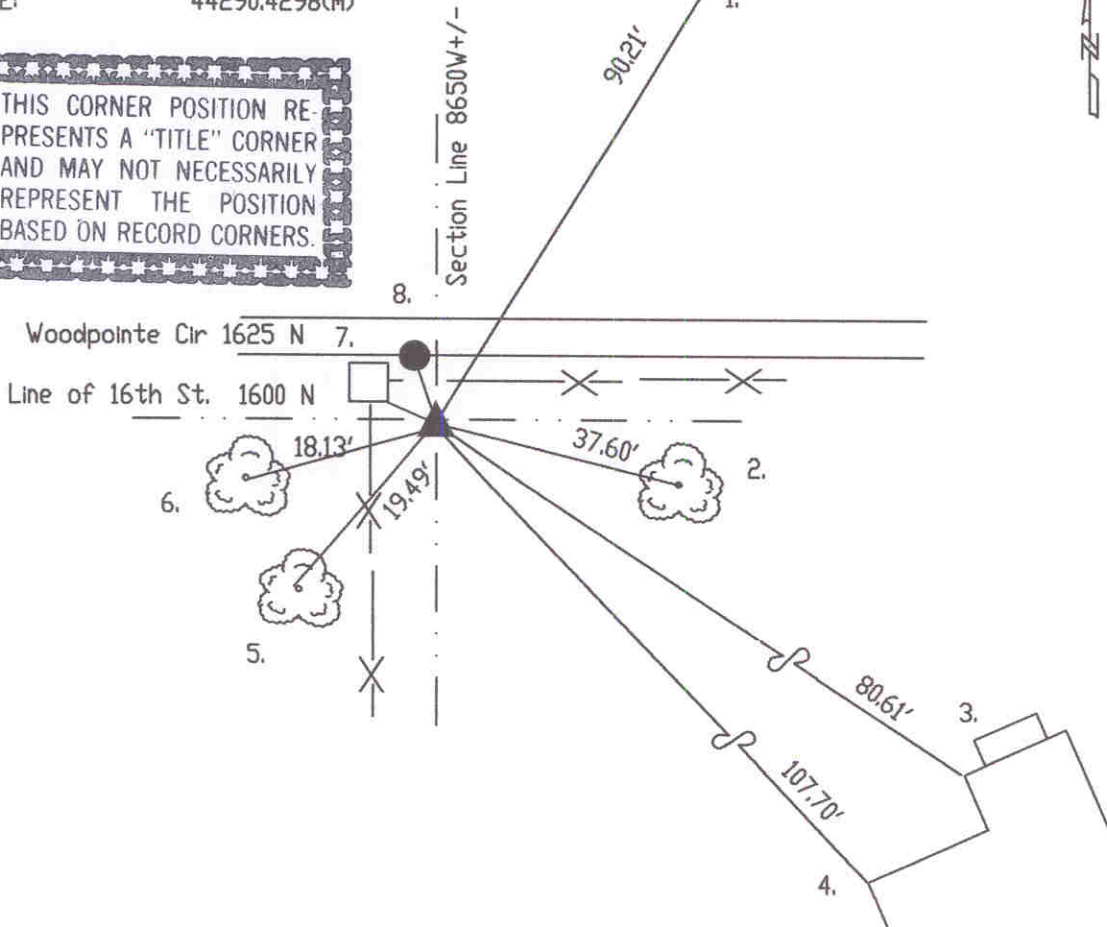


OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 33 TOWNSHIP 16 RANGE 2
DATE: 6-8-99
PARTY CHIEF: Kiste
CREW: _____
TYPE OF MARKER: Harrison
METHOD OF ESTABLISHMENT: County: 4-29-94

IN. S.P.C. E ZONE, NAD 83
NAME: 16023305
N: 503972.6430(m)
E: 44290.4298(m)

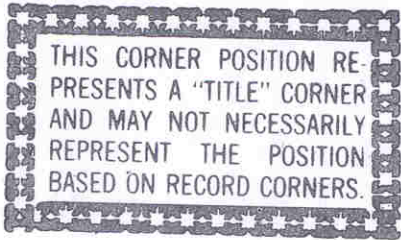

No mention of monument nor witnesses in Wayne Township Legal Survey Book. Best 2-27-64 referenced but did not call description of marker. Miller 3-12-76 called stone with high point. Excavated 4-29-94 by Kiste and called stone found at surface. Stone measured 18"x18"x18" with high point at surface. Harrison set. Re-tied 6-8-99 by Kiste.

HC623305

REF.	DISTANCE	DESCRIPTION
1.	90.21'	Top nut of fire hydrant
2.	37.60'	PK nail S 18" twin hackberry 12'up
3.	80.61'	Northwesterly corner of 'bump out' Address #1518
4.	107.70'	Northwesterly corner Address #1518
5.	19.49'	PK nail w/shiner W 20" hackberry 12'up
6.	18.13'	PK nail w/shiner N 20" oak 12'up
7.	1.69'	SE corner of 4" square wooden corner post
8.	11.56'	PK nail in expansion joint of curb